



# RevWell GECKO®

## PRODUCT DESCRIPTION


The 2.50 RevWell GECKO® is a downhole Hi-Ex Gauge Hanger for the reliable deployment of memory gauges in oil & gas wells. The design is scalable to accommodate a variety of completion sizes and types.

## PRODUCT BENEFITS

The single Hi-Ex anchor mechanism of the RevWell GECKO® enables setting in nipple-less completions and mono bores. Run alone independent of setting tools

## FLEXIBLE PLATFORM

RevWell GECKO® can be set relying on well pressure and can be configured to be set by RevWell HYDRO® or 3rd party setting methods.

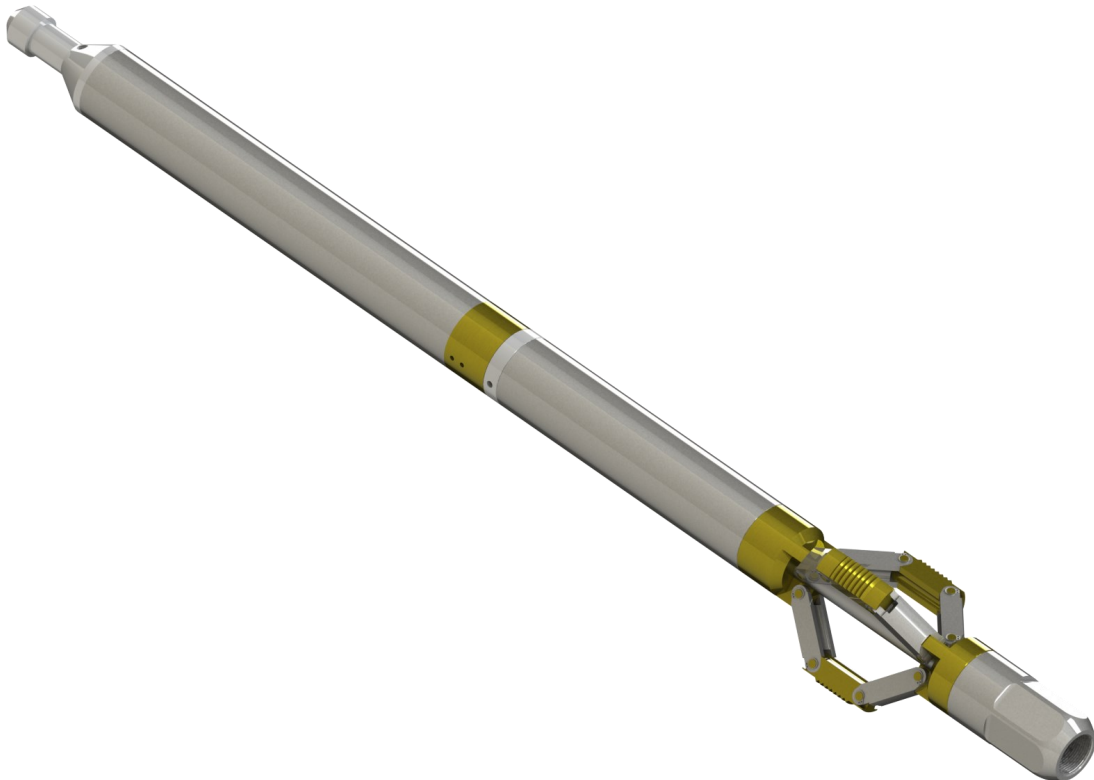



# RevWell GECKO®

## PRODUCT APPLICATION

The 2.50 RevWell GECKO® is used as a nipple-less Gauge Hanger easily set in mono-bores and large completions. The Hi-Ex Hanger features a programmable electronic timer and an HP valve that allows the utility of well pressure for setting at a pre-set time. The Hanger is deployed on Slickline.

## PRODUCT FEATURES

- ◆ Adaptive High Expansion anchor mechanism
- ◆ Optimal range for standard API and non-standard pipe sizes
- ◆ High accuracy setting
- ◆ Does not require a setting tool, but can be configured to accommodate one
- ◆ Compliance with NACE MR0175/ISO 15156
- ◆ Hanger release done with standard SB Pulling Tools

## SPECIFICATIONS

Tool OD	2.50	in
Tool Length (Fully retracted)	2.75	ft
Tool Weight	15	lb
Max. Well Pressure	10	ksi
Max. Well Temperature	350	°F
Service	Standard & H <sub>2</sub> S	
Maximum Fishing Tension	35	klbf
Maximum Compressive Strength	35	klbf
Max Radial Reach <sup>1</sup>	9.63	in

<sup>1</sup> Achievable with Ultra-Hi-EX redress kit (Not Shown in this data sheet)

Type of Fishing Neck	External
Pulling Tool Size	2.50" SB
Bottom Connection	1-9/16" SR

